


1600 SLIDING WINDOW SYSTEMS

PRODUCT TYPES


- Fixed Window Framing
- Horizontal Slider
- Single Hung

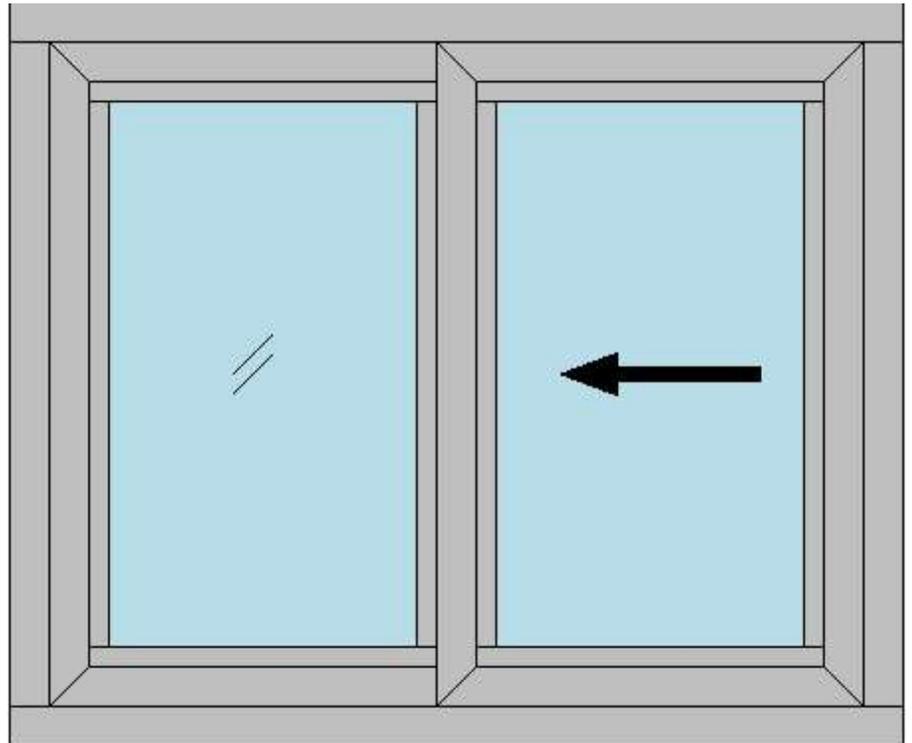

PRODUCT FEATURES

- 4" Frame Depth
- High-performance polyamide thermal break
- Interior glazing
- Full rain screen system to allow water go out
- Durable EPDM seal gaskets on exterior and interior
- Setting for one inch glazing
- Combination with fixed window wall system
- Standard finish in clear anodized and black anodized, options to different colors on exterior and interior

1600 SLIDING WINDOW SYSTEMS

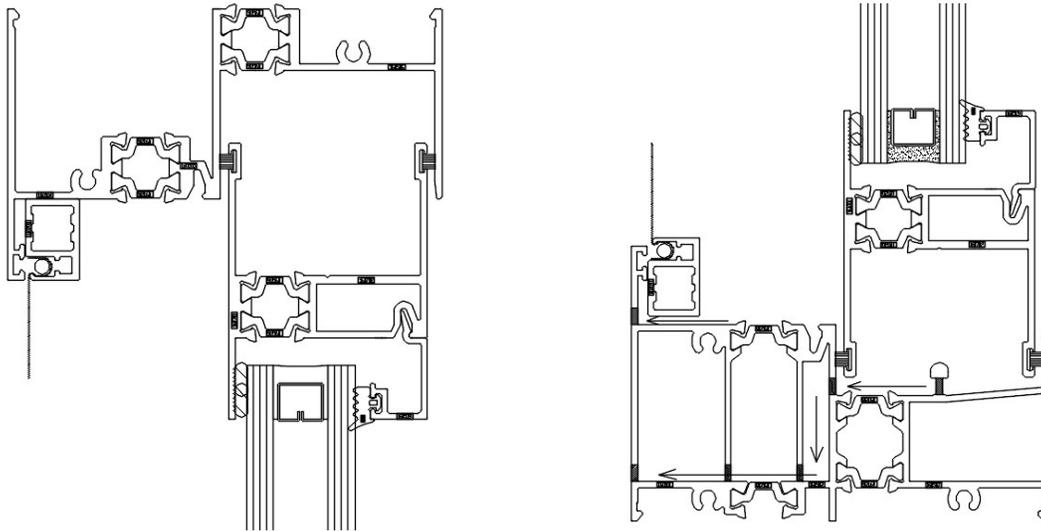

SIZE DETAILS

Type	Frame Depth	Mullion Sightline	Jamb Sightline	Head Sightline	Sill Sightline	Thermal Break Depth	Glass Overall Thickness
Fixed Window Framing	101.6mm (4")	63.5mm (2 1/2")	38.1mm (1 1/2")	38.1mm (1 1/2")	38.1mm (1 1/2")	16.0mm (5/8")	Double Glazed 25.4mm (1")
Horizontal Slider			38.1mm (1 1/2")	63.5mm (2 1/2")	66.7mm (2 5/8")		
Single Hung			63.5mm (2 1/2")	38.1mm (1 1/2")	63.5mm (2 1/2")		

PERFORMANCE

Product designation	Air Leakage Resistance	Water Penetration Resistance	Uniform Load Deflection	Uniform Load Structural	Forced-entry Resistance	U-factor
Class CW-PG60	<0.3 L/s/m2 (<0.06 cfm/ft2) @ 75 Pa (1.60 psf)	330 Pa (6.89 psf)	Design 3360 Pa (70.2 psf)	Design: 3360 Pa (70.2 psf)	F10 rating	See U-factor Table