


1600 SLIDING WINDOW SYSTEMS

PRODUCT TYPES


- Fixed Window Framing
- Horizontal Slider
- Single Hung

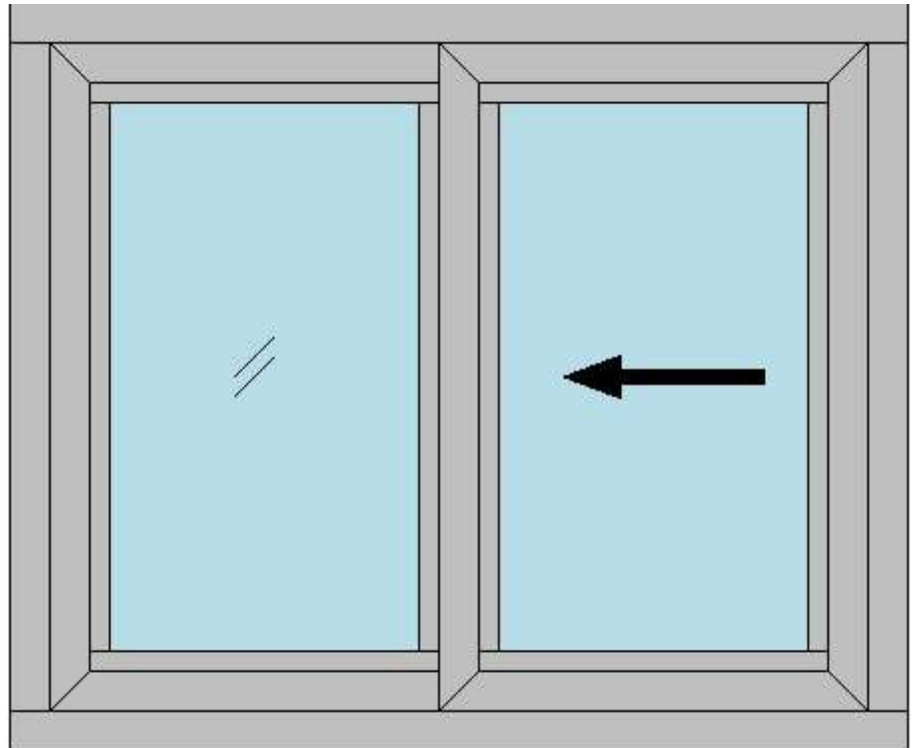

PRODUCT FEATURES

- 4" Frame Depth
- Setting for one-inch sealed glazing unit
- High-performance polyamide thermal break
- Interior glazing
- Full rain screen system to allow water go out
- Durable EPDM seal gaskets on exterior and interior
- Combination with fixed window wall system
- Standard finish in clear anodized and black anodized, options to different colors on exterior and interior

1600 SLIDING WINDOW SYSTEMS

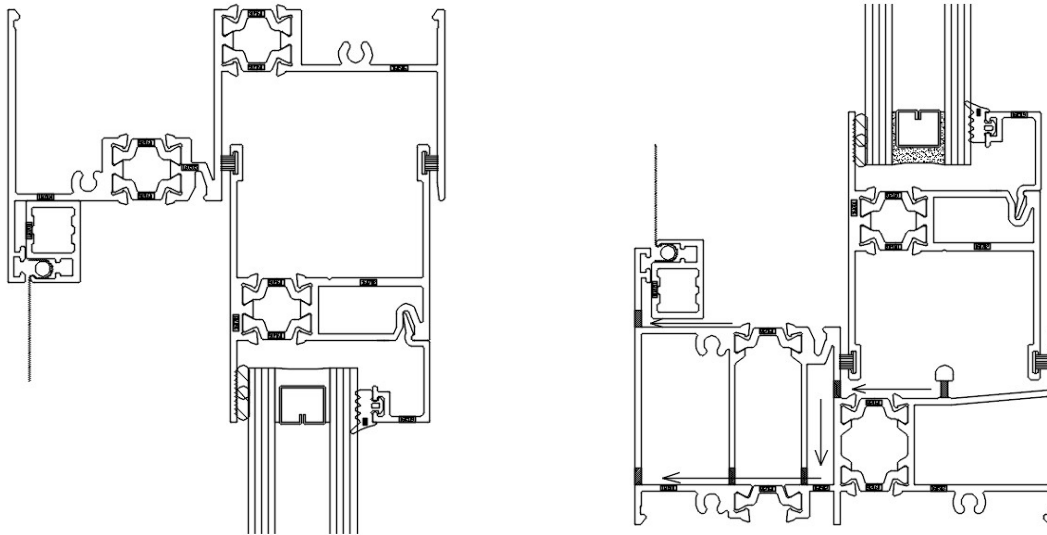

SIZE DETAILS

Type	Frame Depth	Mullion Sightline	Jamb Sightline	Head Sightline	Sill Sightline	Thermal Break Depth	Glass Overall Thickness
Fixed Window Framing	101.6mm (4")	63.5mm (2 1/2")	38.1mm (1 1/2")	38.1mm (1 1/2")	38.1mm (1 1/2")	16.0mm (5/8")	Double Glazed 25.4mm (1")
Horizontal Slider			38.1mm (1 1/2")	63.5mm (2 1/2")	66.7mm (2 5/8")		
Single Hung			63.5mm (2 1/2")	38.1mm (1 1/2")	63.5mm (2 1/2")		

PERFORMANCE

Product designation	Air Leakage Resistance	Water Penetration Resistance	Uniform Load Deflection	Uniform Load Structural	Forced-entry Resistance	U-factor
Class CW-PG35	A3 <0.47 L/s/m ² @ 75 Pa	B3 330 Pa (6.89 psf)	Design: C5 2880 Pa (60.15 psf)	Design: C5 2880 Pa (60.15 psf)	F40 rating	See U-factor Table